


TRANSFORMERS



DESCRIPTION

The Brilliance Transformer features a high-quality, stainless steel case and includes multi taps to accommodate voltage drop. Available in 75, 150, 300, and 600 watts, these transformers are sure to support any size of project. Pair with the Smart Socket 2.0 (sold separately) for astronomical timing via the Brilliance Smart app.

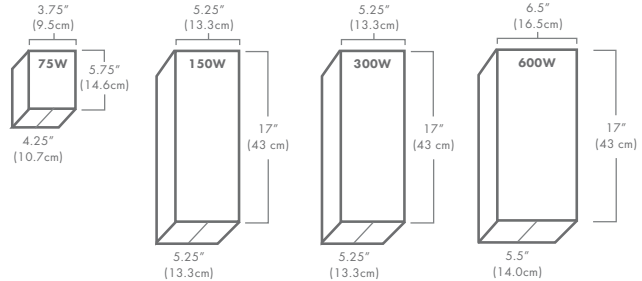

FEATURES

- UL 1838 Certified
- Secondary circuit breaker
- Two knockout sizes for conduit
- Removable bottom & 4ft Grounded plug
- Canted terminal block for easy access

Part Number:
BRI-XFORMER-XXX
 |
 Wattage





BRI-XFORMER-300

TRANSFORMER SPECS

Wattage	75	150	300	600
Finish	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Photocell/Timer	Included	Compatible	Compatible	Compatible
Secondary Circuit Breaker	Red	Orange	White	Circuit #1 & Circuit #2, White
Multi Tap	12V, 15V	12V, 13V, 14V, 15V	12V, 13V, 14V, 15V	12V, 14V, 16V, 18V, 20V, 22V
Dimensions (in.)	3.75 x 5.75 x 4.25	5.25 x 17 x 5.25	5.25 x 17 x 5.25	6.5 x 17 x 5.5
Dimmable	On Primary Side	On Primary Side	On Primary Side	On Primary Side
Warranty	Lifetime	Lifetime	Lifetime	Lifetime

TECHNICAL REQUIREMENTS: Design and plan lighting systems with volt amps in mind. Use the Brilliance Volt Amps chart to estimate the total draw on the system and choose the appropriate size of transformer accordingly.